


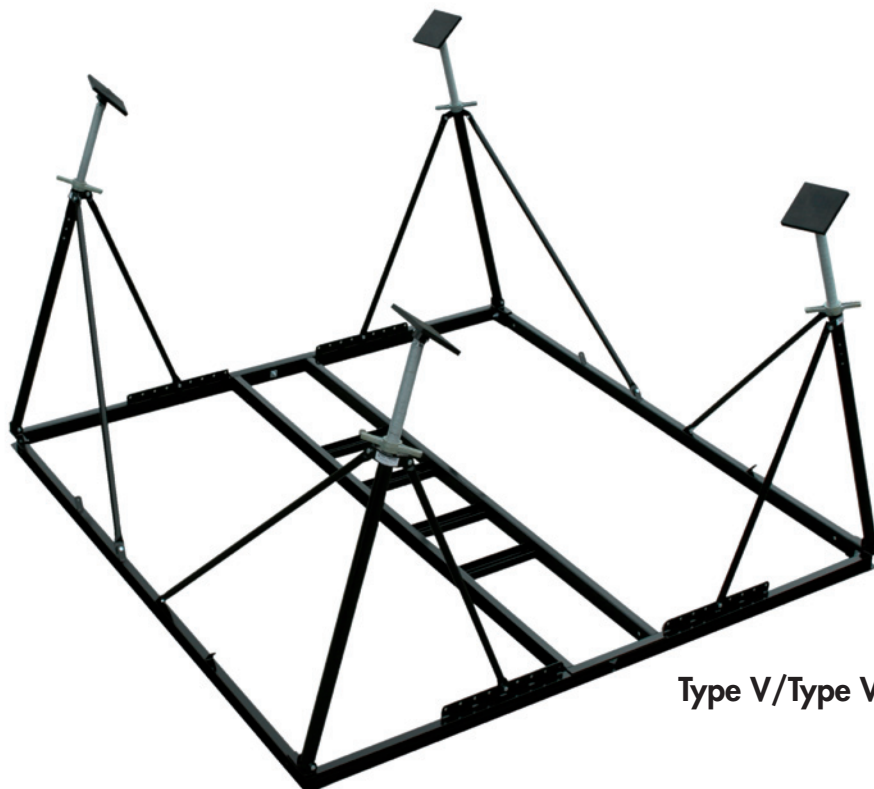


Type V/Type VI

SteelCradle/TYRESÖVAGGAN

Type	Max load (kg)	# of support stands	Width (m)	Length (m)	Height support stand (ca m)	Weight (ca kg)
V	7000	+2	3,0	3,0	1,1-1,8	165
				4,0		180
Extension kit V				+1,35		60
VI	7000	4	3,0	3,0	1,4-2,1	180
				4,0		200
Extension kit VI				+1,35		60

BOATHANDLING SYSTEMS

SteelCradle/TYRESÖVAGGAN

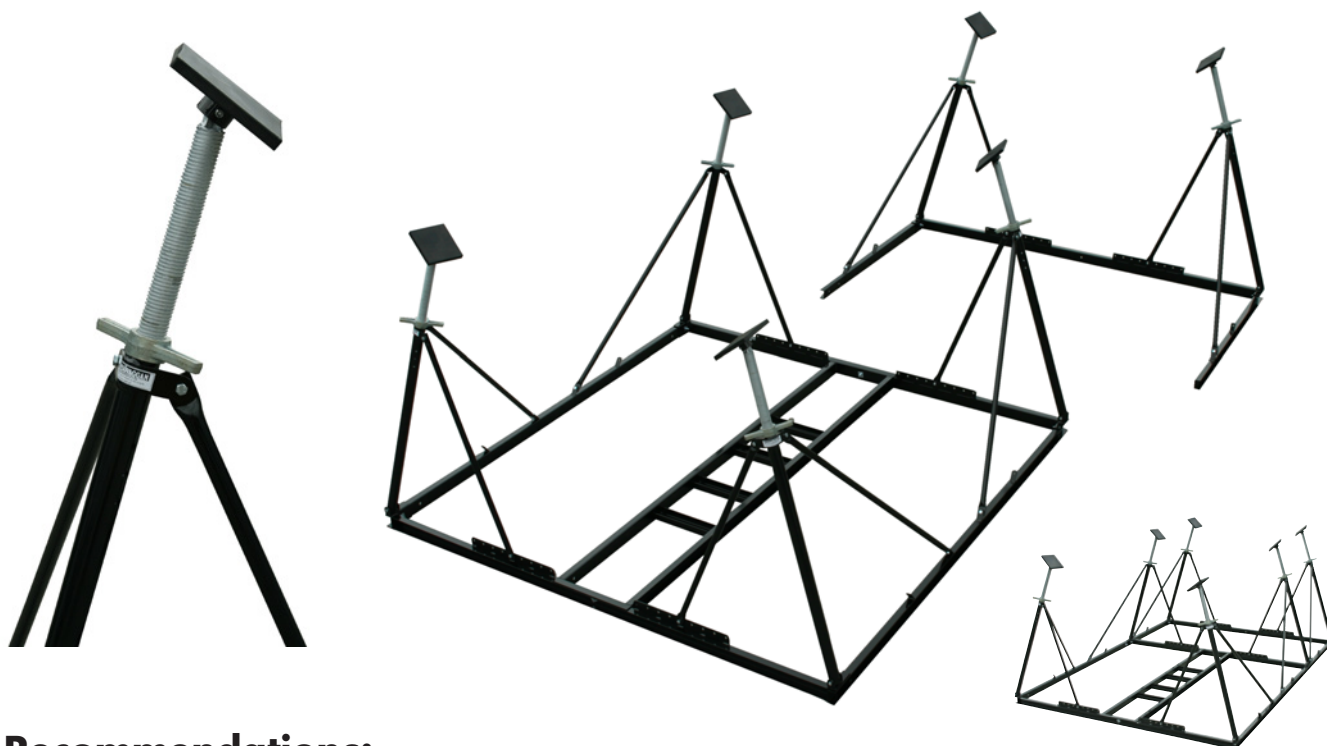

Recommendations:

The length of the cradle should be approximately 1/3 of the length of the boat. Motorsailers may need stanchions with specially adapted height.

For extra stability for boats with heavy stern/aft, use the extension kit (maximum 2 per cradle).

If in doubt – consult the manufacturer.

Cradle				Boat				
Type	Length (m)	Width (m)	# of support stands	Type of keel	Length (m)	Width (m)	Draught (m)	Weight (ton)
V	3,0	3,0	4	fin/long	max 8	3,5–4,5	1,0–1,6	max 7
	4,0				8–10			
					10–12			
VI	3,0	3,0	4	fin	8–10	3,5–4,5	1,6–1,9	max 7
	4,0				10–12			