



# COMPLETE CONTROL & MONITORING SYSTEM

## For Lopolight LED Navigation Lights

---

- Scalable for all vessel types and sizes
- Single or dual power supplies
- 230VAC, 115VAC and 24VDC versions
  
- Customized switch panel w/IP67 protection
- Compact form factor
- Interface to bridge systems
- Extra panel for double bridge vessels
- Automatic switch over functions
- Plug and play integration with all Lopolight Nav Lights
  
- Type approved IEC 60945
- Conforms to IMO MSC253



# NAVIGATION LIGHT CONTROLLER



The brains in the system the type approved Lopolight Monitoring Relay

Manual control for each navigation light

One monitoring relay per navigation light

IP66 steel cabinet from Schneider

power coated grey RAL 7035

Hard coat anodized for ultimate protection

Recessed buttons for secure control

# CONTROL PANEL



Text according to customer preference

Smaller versions available for fewer lights

4 group buttons, user configured

IP67 (front)

Compact form factor

Dimming control for panel and steering light

Pairing of lights, user configured


Each panel is customized, only showing lights on vessel

Prepared for NAVY/ SAR dimmable lights

**High quality type approved components used throughout**

**Up to 5 years warranty according to Lopolight warranty system.**

# SYSTEM OVERVIEW

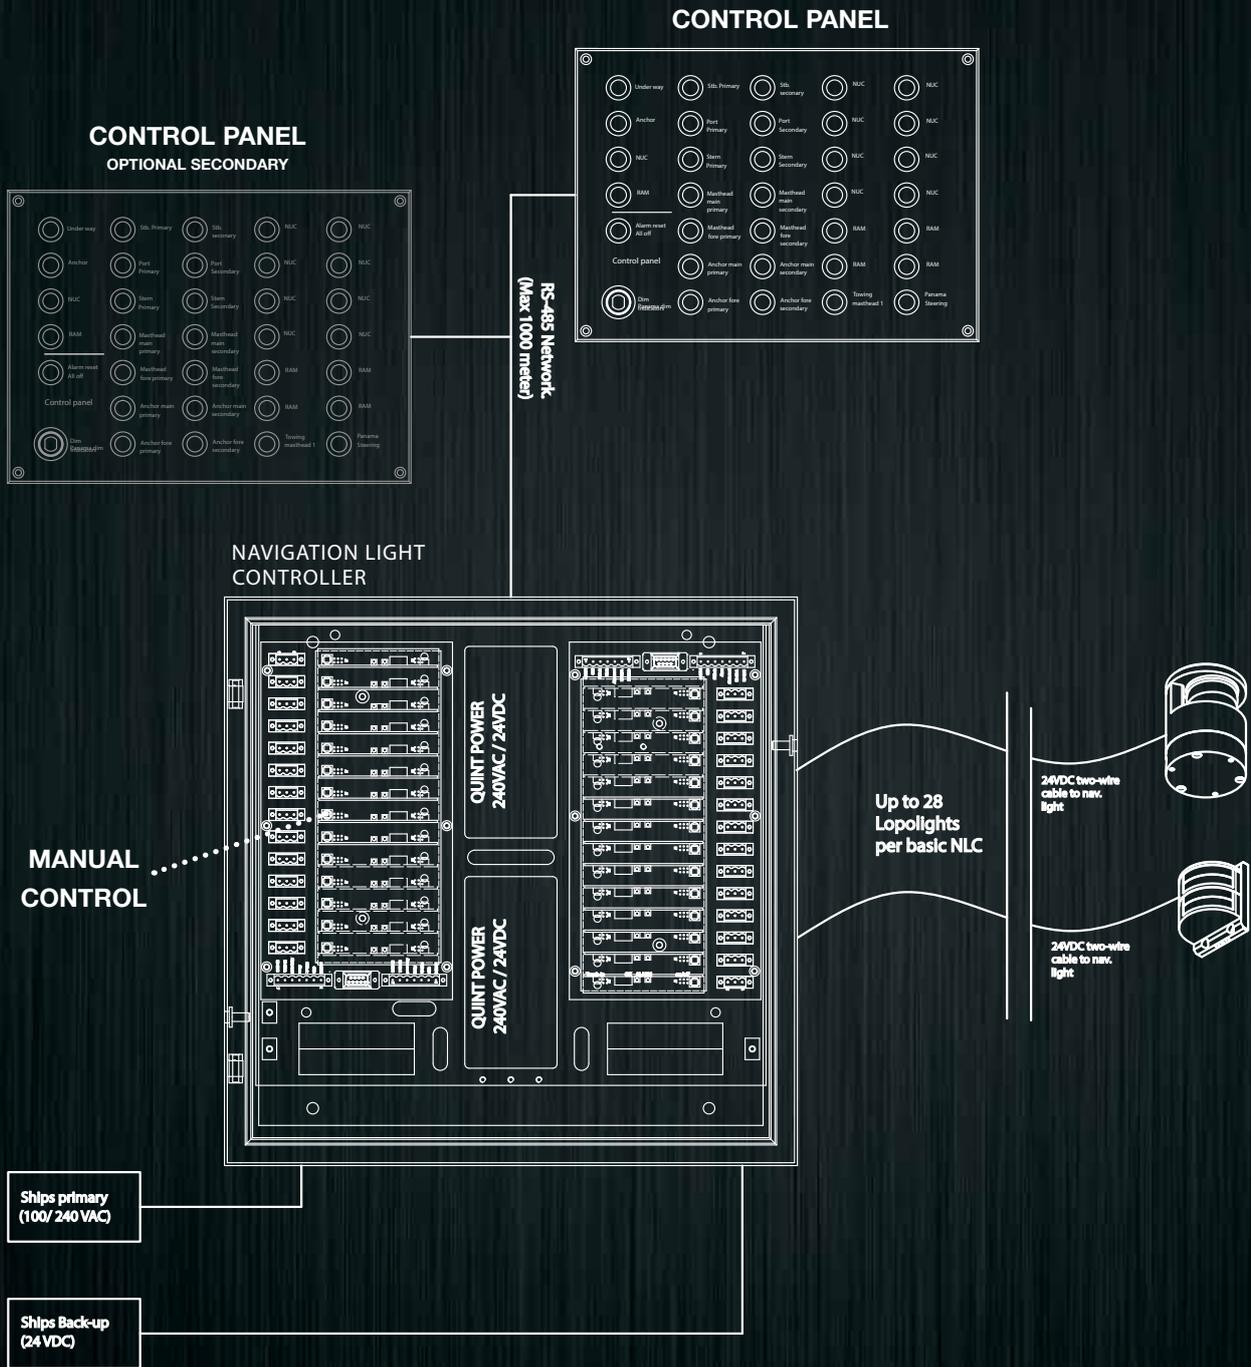

Lopolight ApS • Ved Klaedebo 12B • DK-2970 Hoersholm • Denmark  
 info@lopolight.com • Tel. +45 3248 5030 • Fax. +45 3248 5032

[www.lopolight.com](http://www.lopolight.com)