

## S.24 Weathertight Door

The Seaglaze Series 24 Heavy Duty Weathertight Door can be ordered as Type Approved to DNV Specification.

The door has been specifically styled to look simple and elegant and yet incorporate significant hidden strength.

A robust custom extruded aluminium section is used to form the outer edge of the door leaf. It has a welded flush panel on the outside and a removable panel on the inner face for maintenance. A marine grade lock can be fitted, which can include common/master key facilities. The Series 24 door can be left fully panelled or be fitted with a fixed window, sliding window or portlight.

To complement the doors' surroundings, both the outer frame and door panels are anodised and powder coated in a wide range of colours.

### Other S.24 Door Options...

- Independent Dog
- Hidden Dog
- Clamp In—Coming Soon
- DHL

### Window Options Include...

- Fixed
- Double Glazed Fixed
- Half Drop
- Portlight

### Key Points:

- Through Fix Frame
- Outward Opening
- Type Approval by DNV Available
- 150mm or 110mm Radius
- Stainless Steel Dogs, Shafts and Handles
- Available with Bell Cranks
- Variety of Finishes Available
- Locks Available
- Fire Retardation Included (not approved)
- Sound Proof Insulation Available
- Centre Handle Option




Outside View



Inside View



## S.24 Weathertight Door

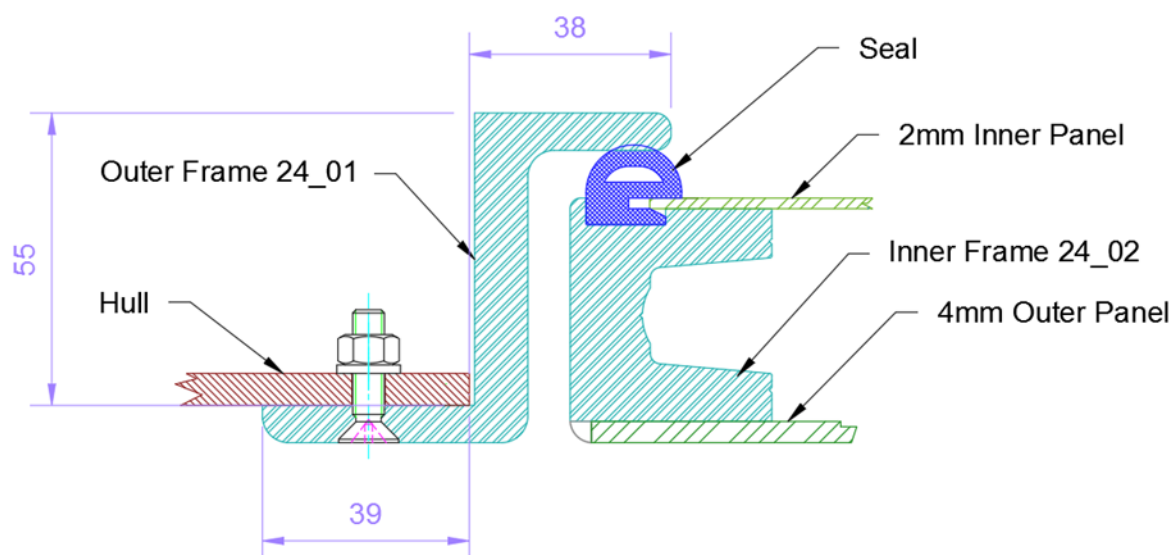

Drawings and 3D models available on request.

### DNV Type Approval Details:



Design Rules...

Max Door Aperture [mm]	Door Panel Thickness [mm]	Max Window Aperture [mm]	Hinges	Max Design Pressure [kN/m <sup>2</sup> ]
1200 x 450	5	N/A	2	29
1200 x 600	4	400 x 250	2	12
1850 x 450	4	N/A	3	19
1850 x 600	5	600 x 250	3	16.5
1850 x 700	5	650 x 450	3	12
1850 x 800	5	650 x 450	4	9.5
1980 x 876	5	650 x 525	4	8

Certificate Number:  
TAS00000D7

Size range from 1200mm x 450mm up to 1980mm x 876mm

Flexible Design Options  
Available with Windows