



# Whale® High Pressure Wash Down Range

## Targeted high pressure wash down range for effective cleaning

- **Smooth constant flow at high pressure:**
  - 3.5 US gals/min (13LPM), 60 psi (4.0bar)
  - 4.5 US gals/min (17LPM), 70 psi (4.8bar)
- **Easy-to-use trigger handset for targeted water flow**  
Soft, non-slip trigger with deck protect nozzle, adjustable jet with push in fittings and dry coupling valve
- **Easy stow 25' (7.6m) coiled hose**  
Compact, kink resistant hose with free stowage bag\*
- **Elite kit includes unique 4 in 1 deck fitting**  
Discreet deck fitting with sliding cover, featuring hose connection, IP65 rated switch and fuse for simple fast installation



**Unique  
4 in 1 deck fitting  
with switch, fuse  
and sliding cover**



**NEW**



# Whale® High Pressure Wash Down Range

## New high pressure wash down range with up to 70 psi (4.8 bar)

- **Smooth constant flow in a range of pump options**
- **Choice of pumps available:** 4.5 US GPM (17 LPM) and 3.5 US GPM (13 LPM)
- **Easy-to-use trigger handset for targeted water flow:** soft, non-slip trigger with deck protect nozzle
- **Easy stow 25' (7.6m) coiled hose:** compact, kink resistant hose with free stowage bag
- **Elite kit includes unique 4 in 1 deck fitting:** discreet deck fitting with sliding cover, featuring hose connection, switch and fuse for simple fast installation

Product Type	Pump Spec	Description	Voltage	Part No.	
Pump	3.5 US GPM / 13 LPM 60 psi (4 bar)	<ul style="list-style-type: none"><li>• Pump</li><li>• Strainer</li><li>• 2 x 1/2" barbed connections included</li></ul>	(12V)	WD3517P	
	4.5 US GPM / 17 LPM 70 psi (4.8 bar)		(12V) (24V)	WD4517P WD4527P	
Pump and Trigger	3.5 US GPM / 13 LPM 60 psi (4 bar)	<ul style="list-style-type: none"><li>• Pump</li><li>• Strainer</li><li>• 2 x 1/2" barbed connections included</li><li>• Adjustable trigger with ergonomic handle &amp; deck protect nozzle</li></ul>	(12V)	WD3517T	
	4.5 US GPM / 17 LPM 70 psi (4.8 bar)		(12V) (24V)	WD4517T WD4527T	
Standard Kit - with Pump, Trigger and Hose	3.5 US GPM / 13 LPM 60 psi (4 bar)	<ul style="list-style-type: none"><li>• Pump</li><li>• Strainer</li><li>• 2 x 1/2" barbed connections included</li><li>• Adjustable trigger with ergonomic handle &amp; deck protect nozzle</li><li>• 25' (7.6m) coil hose, storage bag and quick release hose connection</li></ul>	(12V)	WD3517S	
	4.5 US GPM / 17 LPM 70 psi (4.8 bar)		(12V) (24V)	WD4517S WD4527S	
Elite Kit includes Pump, Trigger, Hose and 4 in 1 Deck Fitting	3.5 US GPM / 13 LPM 60 psi (4 bar)	<ul style="list-style-type: none"><li>• Pump</li><li>• Strainer</li><li>• 2 x 1/2" barbed connections included</li><li>• Adjustable trigger with ergonomic handle &amp; deck protect nozzle</li><li>• 25' (7.6m) coil hose, storage bag and quick release hose connection</li><li>• Deck fitting with switch, fuse and sliding cover</li></ul>	(12V)	WD3517E	
	4.5 US GPM / 17 LPM 70 psi (4.8 bar)		(12V) (24V)	WD4517E WD4527E	

For further information: [info@whalepumps.com](mailto:info@whalepumps.com) or [www.whalepumps.com](http://www.whalepumps.com)





# Whale® High Pressure Wash Down Range


## Targeted high pressure wash down range for effective cleaning

### Specification


	Pump only models			Pump & trigger models		
Product Code	WD3517P(B)**	WD4517P(B)	WD4527P(B)	WD3517T(B)	WD4517T(B)	WD4527T(B)
Voltage	12V d.c.		24V d.c.	12V d.c.		24V d.c.
Flow Rate	3.5 US GPM / 13LPM	4.5 US GPM / 17 LPM		3.5 US GPM / 13 LPM	4.5 US GPM / 17 LPM	
Pressure Switch Setting	60 psi (4 bar)	70 psi (4.8 bar)		60 psi (4 bar)	70 psi (4.8 bar)	
Recommended Automotive Fuse Size	15A		10A	15A		10A
Weight	5.1lbs (2.3kg)	6.2lbs (2.8kg)		5.3lbs (2.4kg)	6.4lbs (2.9kg)	
Inlet/Outlet Size	½ inch NPT Male			½ inch NPT Male		
Semi Rigid Pipe-work Connections	½ inch barb connections only			½ inch barb connections only		
Materials in Contact with Liquid	Pump: Stainless steel, EPDM, Santoprene, Fittings: ABS, PVC, PP, PA, PC, POM			Pump: Stainless steel, EPDM, Santoprene Fittings: ABS, PVC, PP, PA, PC, POM		
Trigger Materials	N/A			ABS		
Minimum Wire Size	14 AWG (2.0mm²)			14 AWG (2.0mm²)		
Maximum Lift	6 feet (1.8m)			6 feet (1.8m)		
Maximum Discharge Head	98 feet (30 m)			98 feet (30 m)		
Warranty	2 Year Limited Warranty			2 Year Limited Warranty		

	Standard Kit - with pump, trigger and hose			Elite Kit - with pump, trigger, hose and 4 in 1 deck fitting		
Product Code	WD3517S(B)	WD4517S(B)	WD4527S(B)	WD3517E(B)	WD4517E(B)	WD4527E(B)
Voltage	12V d.c.		24V d.c.	12V d.c.		24V d.c.
Flow Rate	3.5 US GPM / 13LPM	4.5 US GPM / 17 LPM		3.5 US GPM / 13 LPM	4.5 US GPM / 17 LPM	
Pressure Switch Setting	60 psi (4 bar)	70 psi (4.8 bar)		60 psi (4 bar)	70 psi (4.8 bar)	
Recommended Automotive Fuse Size	15A		10A	15A		10A
Weight	6.8lbs (3.1kg)	7.9lbs (3.6kg)		7.7lbs (3.5kg)	8.6lbs (3.9kg)	
Inlet/Outlet Size	½ inch NPT Male			½ inch NPT Male		
Semi Rigid Pipe-work Connections	½ inch barb connections only			½ inch barb connections only		
Materials in Contact with Liquid	Pump: Stainless steel, EPDM, Santoprene, Fittings: ABS, PVC, PP, PA, PC, POM			Pump: Stainless steel, EPDM, Santoprene, Fittings: ABS, PVC, PP, PA, PC, POM		
Trigger Materials	ABS			ABS		
Hose Materials	Hose: Polyurethane, Brass			Hose: Polyurethane, Brass		
Minimum Wire Size	14 AWG (2.0mm²)			14 AWG (2.0mm²)		
Maximum Lift	6 feet (1.8m)			6 feet (1.8m)		
Maximum Discharge Head	98 feet (30 m)			98 feet (30 m)		
Warranty	2 Year Limited Warranty			2 Year Limited Warranty		


\* Included with Standard and Elite Kits only \*\* note (B) suffix denotes bulk packaging for boat builders- minimum order quantities may apply.

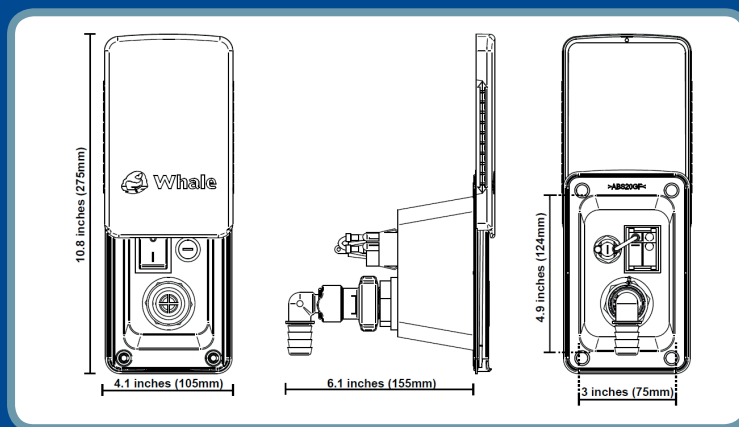

Whale Washdown 4in1  
Deck Fitting Elite Kit  
dimensions

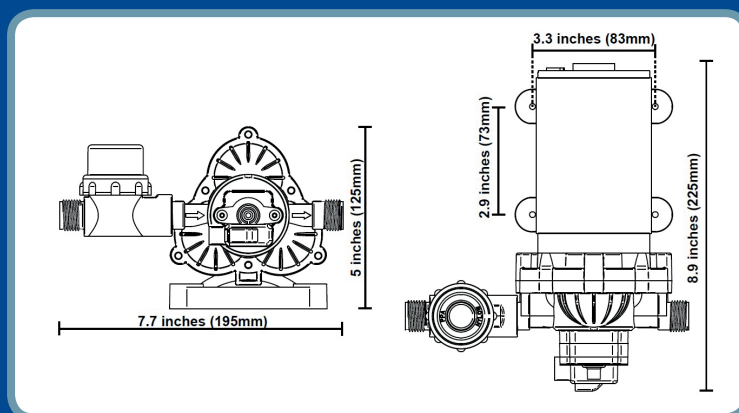

Whale Washdown 3.5  
dimensions

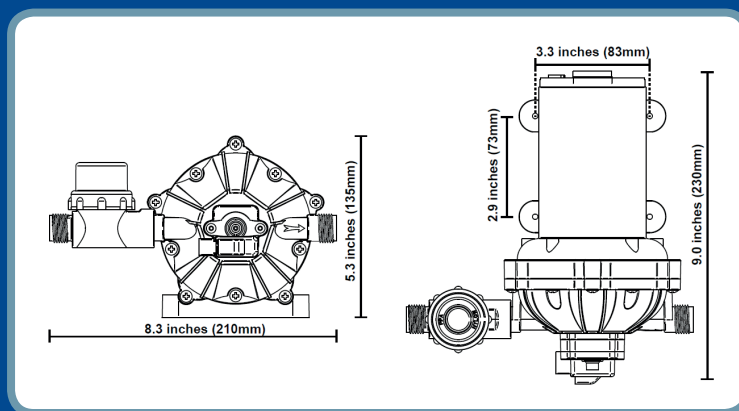

Whale Washdown 4.5  
dimensions



For further information: [info@whalepumps.com](mailto:info@whalepumps.com) or [www.whalepumps.com](http://www.whalepumps.com)



Copyright Whale ©2018

All rights reserved. Reproduction in whole or in part without permission is prohibited. WHALE is a registered trademark of Munster Simms Engineering Limited, Bangor, Northern Ireland trading as Whale. Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice. Neither the accuracy nor completeness of the information contained in this or any product literature is guaranteed by the Company and may be subject to change at its sole discretion. Illustrations are for guidance purposes only.