



# Whale® Watermaster

## Automatic Pressure Pump Range

4 chamber design delivers smooth consistent flow.



Anti-vibration feet for reduced noise

**FREE**

Inlet filter for pump protection

4 chamber pump head ensures smooth constant flow

### Powerful performance

- High flow rates at a variety of outlets
- Smooth constant flow
- Self-priming up to 3m (10ft)
- Quiet operation
- Plug 'n' Play easy installation - Suitable For 15mm Quick Connect plumbing or ½" threaded hose connections
- For use with salt or fresh water

### Designed for the harsh environment


- Fully sealed protective motor housing—IP65 Rated - No water ingress
- Integrated protected pressure switch
- Runs dry without damage
- Inlet strainer protects pump from debris




# Whale® Watermaster

## Automatic Pressure Pump Range

4 chamber design delivers smooth consistent flow.

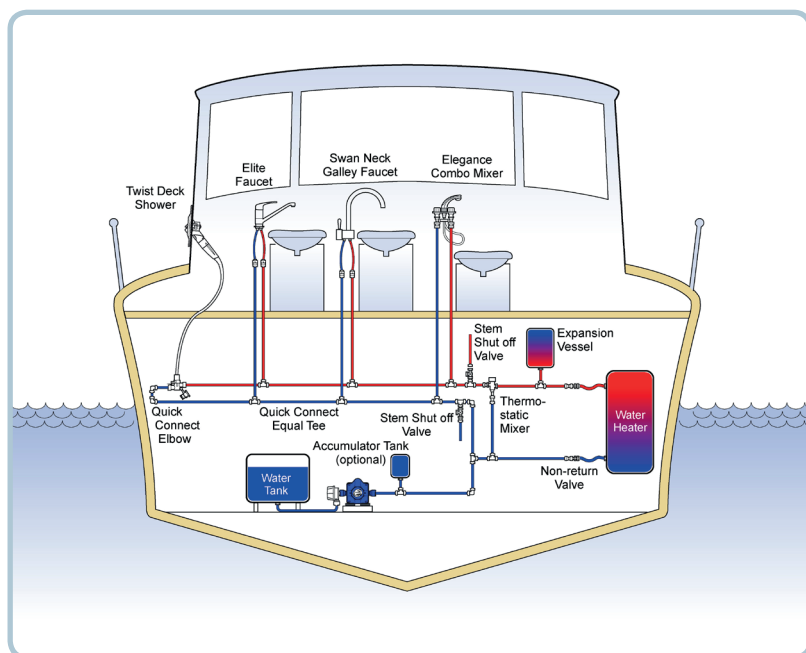

Typical Installation

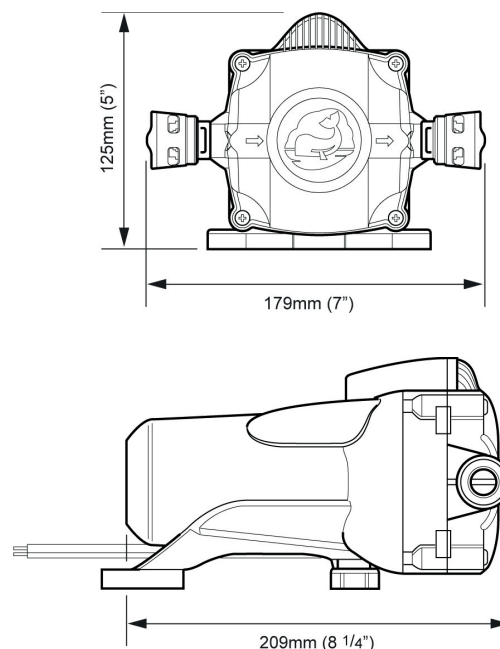

Dimensions

Specification				
Product Code	FW0814	FW1214	FW1215	FW1225
Open Flow Rate (per min)	8ltrs (2.0 US GPM)	11.5 ltrs (3.0 US GPM)		
Number of Outlets	1 - 2 outlets	3 - 4 outlets		
Voltage	12 V d.c.			24 V d.c.
Max. System Pressure	2 bar (30psi)		3 bar (45psi)	
Hose Connections	Whale® Quick Connect 15mm Female Connections 2 x ½” Threaded Connectors and 2 x ½” Barbed Connectors included			
Recommended Fuse Size	5 Amp Automotive	7.5 Amp Automotive	7.5 Amp Automotive	5 Amp Automotive
Current Draw	4 amps	6 amps	6 amps	3.5 amps
Weight	1.5kg (3.3lbs)			

Ref: Omcc\_pshaw\_wmaster\_eu\_v1\_0618

For further information: [info@whalepumps.com](mailto:info@whalepumps.com) or [www.whalepumps.com](http://www.whalepumps.com)



© Copyright Whale® 2018 – All rights reserved. Reproduction in whole or in part without permission is prohibited. WHALE® is a registered trademark of Munster Simms Engineering Limited, Bangor, Northern Ireland trading as Whale. Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice. Illustrations are for guidance purposes only. Neither the accuracy nor completeness of the information contained in this or any Product literature is guaranteed by the Company and may be subject to change at its sole discretion.