# MARINE HYDRAULIC EQUIPMENT CONOLIFT STEEL PONTOON FISH CAGES AQUACULTURE FLOATING DOCK SYSTEMS MARINE

## AQUACULTURE STEEL PONTOON FISH CAGES



MARINE FLOATING DOCK SYSTEMS



Innovation and quality remain the defining characteristics of our products today. Kropf Industrial Inc. is the umbrella under which our other product lines operate. With modern CNC cutting and machining equipment, as well as years of experience, we are capable of handling a wide variety of custom fabrication jobs.

KROPF CONOLIFT manufactures a full line of versatile marine hydraulic equipment that will improve your operations and increase your bottom line. Available in 3 – 100 Tonnes.

KROPF AQUACULTURE manufactures steel pontoon fish cages and walkways. These rugged steel cages provide a safe and secure structure with a working platform for fish farming operations.

KROPF MARINE has been providing quality steel tube floating dock systems to discerning clients for over 25 years. Our commitment to superior workmanship and conscientious customer service has allowed Kropf Industrial Inc. to become an industry leader in the floating dock market.







CONTACT US FOR ALL YOUR MARINE NEEDS North America 1.888.480.3777 Worldwide 705.378.2453 www.kropfindustrial.com · info@kropfindustrial.com 1 Quebec Drive, RR2, Parry Sound, Ontario, Canada P2A 2W8 INNOVATION QUALITY COMMITMENT







## MARINE HYDRAULIC EQUIPMENT



INNOVATION QUALITY COMMITMENT

**CONOLIFT OFFERS EVERYTHING YOU WANT IN A TRAILER** TODAY AND IN THE FUTURE ... EASE OF OPERATION, LOW MAINTENANCE AND HIGH RESALE VALUE! **HIGHWAY TRAILERS, YARD TRAILERS, SELF-PROPELLED** TRAILERS, SLING LIFT TRAILERS, MOBILE STRADDLE **CARRIERS AND GALVANIZED BOAT STANDS** 

## **CONOLIFT MARINE HYDRAULIC EQUIPMENT**

YARD TRAILER DIMENSIONS

С

18" - 52"

20" - 40"

22" - 52"

22" - 58"

24" - 60"

24" - 60"

24" - 62"

24" - 62"

30" - 66"

29" - 64"

29" - 64"

D

4' 11"

5'

5' 4"

6' 4"

7' 5"

8' 6"

10' 6"

11' 6"

16'

14' 6"

16' 5"

E

13' 1"

16' 3"

17'

20' 2"

22'

24'

27'

29' 6"

36'

42'

59' 6"

В

54"

64"

68" - 98"

68" - 98"

68" - 98"

68" - 98"


84" - 114"

84" - 114"

96" - 126"

97" - 127'

97" - 127"

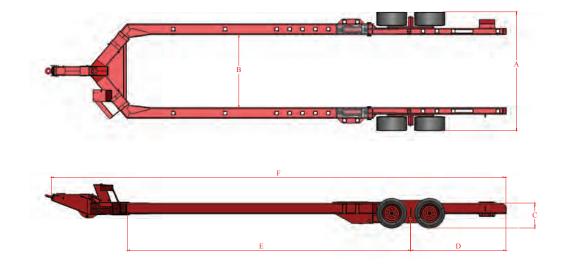

Α

90"

102"

102" - 128"

102" - 132"

107" - 137'

107" - 137'

130" - 160"

130" - 160"

156" - 186"

159" - 189"

166" - 196"

## **OPTIONAL EQUIPMENT**

Hydraulic sail arm package for deep draft vessels

Hot dipped galvanized frame, hubs and components

Stainless steel hydraulic hose ends and fittings package

Hydraulic fifth-wheel gooseneck (Y-20 and above)

Spare tire

E

24' 6"

26' 10'

28' 10

32' 9"

35' 6'

38' 6"

45'

48' 6'

60'

67'

94' 5"

Front dolly wheels and winch

Wireless remote control with manual backup

Rear pad equalizing system

ENGINE

HP.

5.5

5.5

5.5

5.5

5.5

5.5

9

11

11

18

18

BOAT

LENGTH

16' - 24'

16' - 30'

18' - 34'

18' - 37'

20' - 42'

20' - 46'

28' - 50'

30' - 60'

30' - 70'

30' - 80'

30' - 90'

5		4	
		Lost,	
SALE FRAN	1		
Cardy Joan Caregori XA			
		14	4
		V III	

## **STANDARD FEATURES**

- 1 One man operation
- 2 Hydraulic pintle tongue **3** Hydraulic pilot operated lock
- valves on all lift functions 4 Up to 58" of frame lift
- 5 Up to 12 adjustable lift pads
- (depending on model) 6 Adjustable pad positioning
- front to rear

## **YARD TRAILERS**

### VERSATILITY

Trailers will support boats as suggested by any manufacturer. One trailer for cradled or non-cradled power and sail boats

Independant side-to-side lift control for uneven terrain.

Expanding frame accommodates wide beam boats; allowing for lower blocking and overhead doors. Hydraulically operated keel support straps to eliminate handling of heavy cross bars.

Adjustable riding height eliminates ground clearance problems. Fully submersible.

Works on a launch ramp or with an overhead lift.

One trailer to accommodate sail/powe boats or multi hull (catamarans).

## **EASE OF OPERATION**

Simplified operator control for synchronized damage free lifting Honda powered hydraulic system eliminating the need for electrical connections or untimely battery power loss.

Self-centering pad design simplifies water retrieval in adverse weather conditions.

Complete Operation & Service Manual Easy to use with multiple tow vehicles.

## **RUGGED COMMERCIAL CONSTRUCTION**

At Conolift, rugged is not just a word ... 10" x 10" & 12" x 12" HSS tubing is used for confident year-after-year reliability.

Honda, Eaton, Hydro Control products ... Quality selected for durability and lifetime service.

Specially selected, high quality, hydraulic cylinders and components ensuring operator and marine craft safety.

Hydraulic components are mounted inside the frame for protection and are easily accessible for servicing.



Hydraulic Rear Strap

MODEL

Y-3

Y-4

Y-5

Y-10

Y-15

Y-20

Y-30

Y-40

Y-60

Y-80

Y-100

LOAD

CAPACITY

8.000 lbs

12,000 lbs

14,000 lbs

20,000 lbs

30,000 lbs

40,000 lbs

60,000 lbs

80,000 lbs

120,000 lbs

160,000 lbs

200.000 lbs

SHIPPING

WEIGHT

2.800 lbs

3,400 lbs

4.000 lbs

5,000 lbs

7,500 lbs

8,000 lbs

11,000 lbs

13,000 lbs

22,000 lbs

30,000 lbs

40,000 lbs



- 7 Hydraulically operated rear keel strap
- 8 Telescopic crossbars to move cradled boats
- 9 Expandable width frame (Y-5 model and above)
- 10 Heavy duty solid mining tires
- **11** Grease zerks and bushings on all wear points

12 Walking beam suspension


- 13 Self-contained Honda powered hydraulic system with major components internally mounted inside the frame
- 14 Industrial grade paint: optional colour choice
- 15 Three year warranty on frame, two years on hydraulic components and ninety days on running gear



Expandable Width Fram



**Extended Frame Lift** 





nized Boat Stand