



ALPHA 70K TMA®



TRINITY
HIGHWAY

Ahead of the Curve™

ALPHA 70K TMA®

The ALPHA 70K TMA® is available for use on stationary or moving shadow support vehicles. The truck mounted attenuator is NCHRP Report 350 Test Level 2 compliant. The unit is comprised of a crushable aluminum body with a Durashell® nose. The ALPHA 70K TMA helps to absorb rear-end impacts at speeds up to 45 mph (70 km/h).



TEST LEVEL 2 COMPLIANT

Features

- Durashell Nose returns to its original shape after typical low-speed nuisance hits.
- Tapered nose also helps minimize corner damage and streamlines appearance.
- Cab control hydraulics allow cartridge to be lowered by driver.
- Hydraulic system tilts a full 90° position for storage.
- Optional receiver hitch provides easier TMA mounting.


Assembly and Maintenance

- Tapered nose helps minimize corner damage and streamlines appearance.
- Jacks help facilitate simple removal.

Specifications

- 8.4' (254 cm) Long*
- 7' 9" (236 cm) Wide*
- 22.5" (57 cm) High*
- 990 lbs. - 1,200 lbs. (450 kg - 550 kg) Depending On Options
- 11,025 lbs. (5,000 kg) Minimum Support Vehicle Weight

*Cartridge only

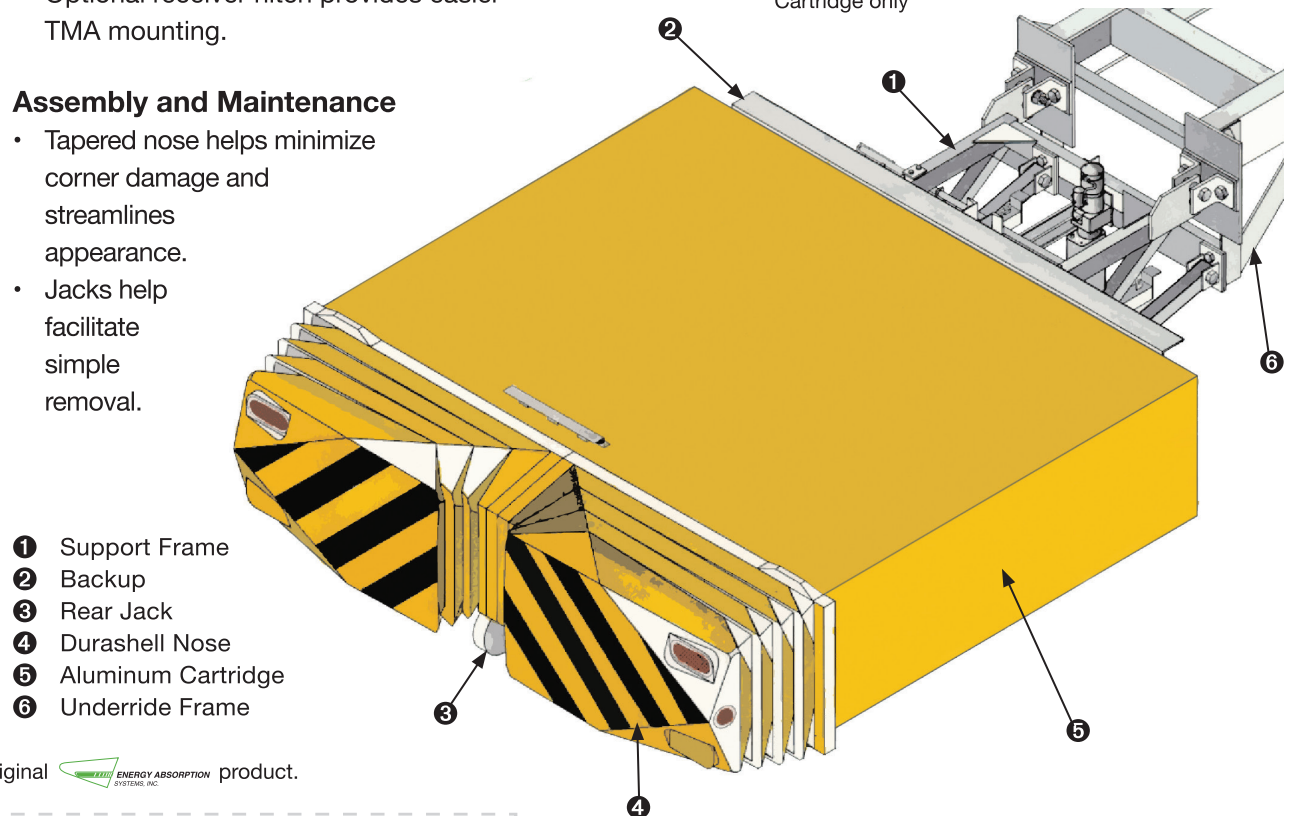

An original  ENERGY ABSORPTION SYSTEMS, INC. product.

Distributed by:



TRINITY
HIGHWAY