



Grey Waste Tank with integrated Intelligent Control

- Integrated sensors for automatic pump control
- Unique 'triple seal' lid isolates electronics from the harsh grey waste environment for advanced durability
- Reliably handles typical shower & galley sink waste up to 90°C even in complex multiple outlet systems
- Solid state switches - no moving parts prone to blockages


Unique 'Triple seal' protection prevents water ingress - no leak paths to electronics

- Single piece molded lid incorporates sensor
- Splash-proof lid
- Protected fully potted circuit board

**Triple Seal
protected
electronics**

IC Intelligent Control®

NEW

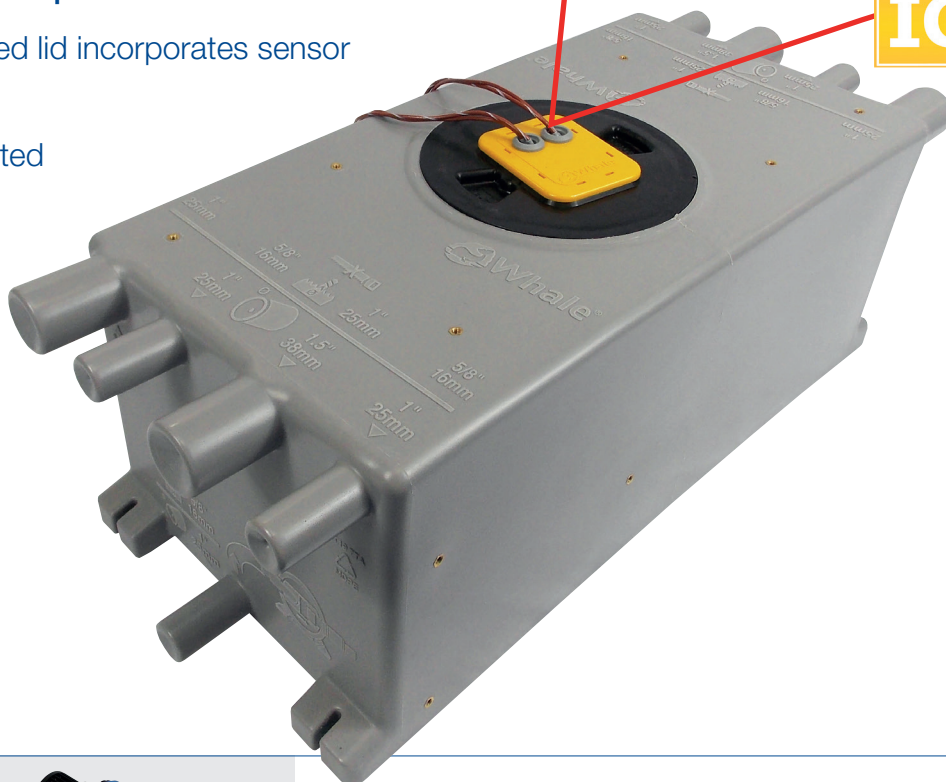

Typical installation-
pumps available separately

**Ideal for larger vessels with many outlets,
dishwashers or even bathtubs on board**

- NEW 20 ltr models offer at least 25% more capacity than previous Whale models
- Double sensor models allow boat builders to fit an additional pump to one tank for a compact high capacity solution or a high level alarm for extra peace of mind



Grey Waste Tank with integrated Intelligent Control

Easy flexible installation

- Easy wiring - connect any 12 or 24V d.c. pump system (up to 20A) with no relay required
- Installation guidance is included on tank*
- Ports shaped for drilling accuracy*
- Fit pumps in protected locations:- choose top or side of tank mounting, or locate pump high and dry away from bedroom areas to minimize noise disruption

Peace of mind


- Double switch models- second sensor can be wired to a high level alarm

Optimized pumping

- The 20 ltr tank base is angled to ensure that waste flows to outlets easily for efficient pump out
- Outlet port and sensor locations minimize air pumping noise*

Low maintenance

- Glass filled polypropylene sensor housing helps reduce debris build-up, and lid provides access to wipe clean sensors

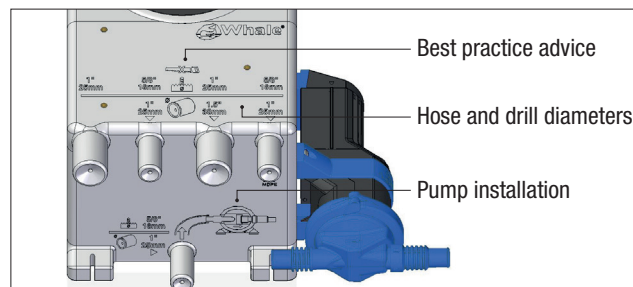

Model	Grey Waste Tanks										
Product Codes	GT0810B	GT0812B	GT0820B	GT0831B	GT1610B	GT1620B	GT1631B	GT2010B	GT2012B	GT2020B	GT2031B
Capacity	8 ltr				16 ltr			20 ltr			
Dimensions	(l=350mm x w=260mm x h=180 mm)				(l= 600mm x w= 250mm x h= 190mm)			(l=600mm x w=250mm x h=230 mm)			
No. of Sensors	1	2	2	1	1	2	1	1	2	2	1
Voltage	12V d.c. / 24V d.c.										
Electrical Connections	Tinned wire ends		2 x Deutsch DT06- 3S-P012	1 x Deutsch DT06- 3S-P012	Tinned wire ends	2 x Deutsch DT06- 3S-P012	1 x Deutsch DT06- 3S-P012	Tinned Wire ends		2 x Deutsch DT06- 3S-P012	1 x Deutsch DT06- 3S-P012
Inlet Hose Connections	19mm (3/4") x 2 25mm (1") x 3 38mm (1 1/2") x 3				25mm (1") x 4 38mm (1 1/2") x 4						
Outlet Hose Connections	19mm (3/4") x 1 25mm (1") x 1				25mm (1") x 2			25mm (1") x 2			
Materials	Tank: MDPE Seals: EPDM/Neoprene, Monprene® Lid: Glass Filled Polypropylene, ABS, Polyurethane										

Ideal for use with Whale Gulper pumps - leading debris handling technology with no filters to unblock or clean. (available separately)

For further information: info@whalepumps.com or www.whalepumps.com

