



LENS: 8mm BOROSILICATE LENS WITH ANTI-STICK COATING

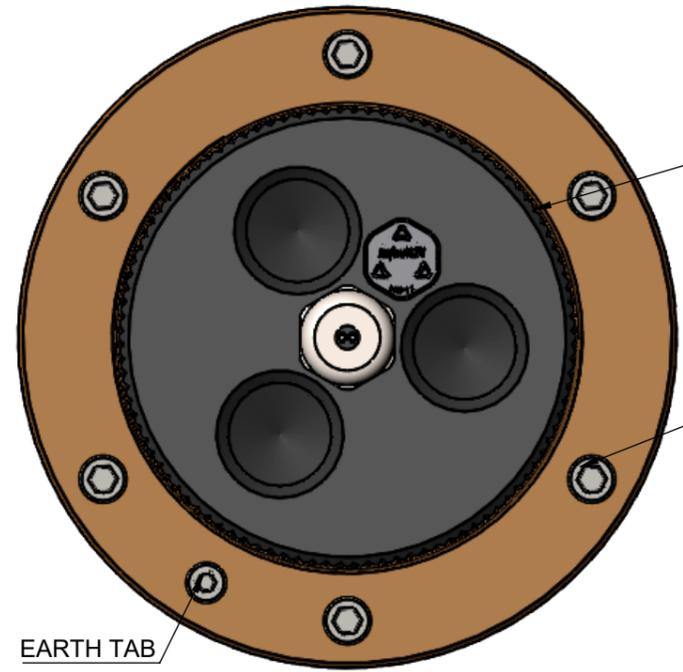

KNURLED SURFACE AIDS INSERTION AND REMOVAL OF LIGHT ENGINE

TIGHTEN MOUNTING BOLTS SEQUENTIALLY

EARTH TAB

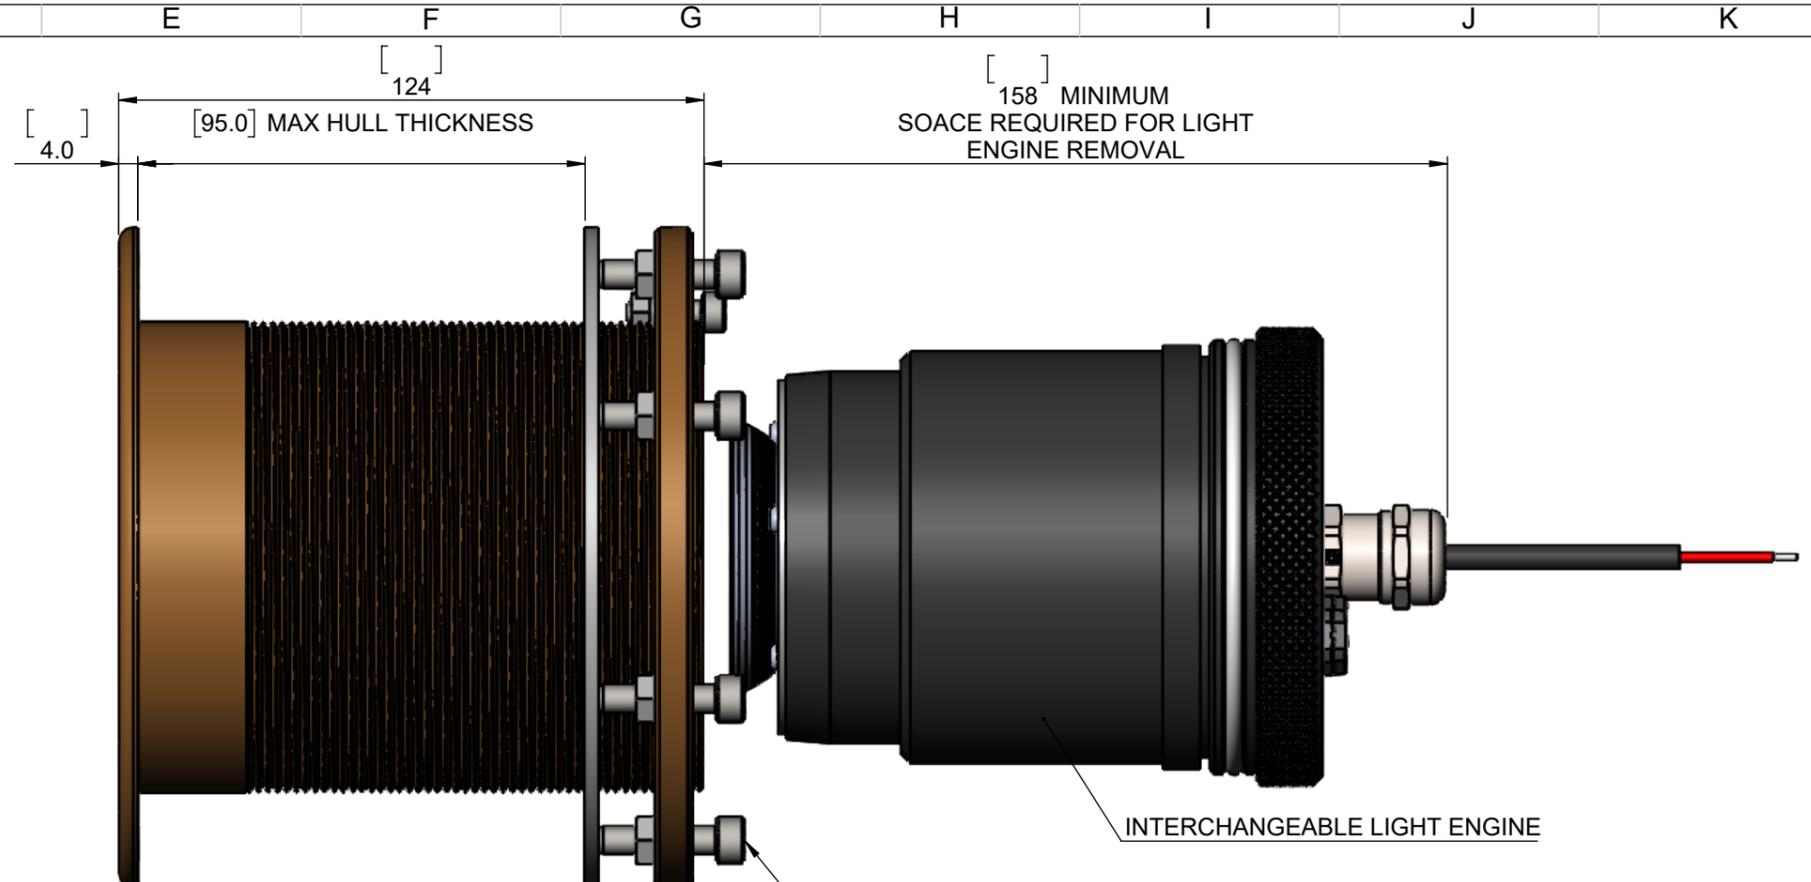

TIGHTEN M6 CLAMPING BOLTS SEQUENTIALLY AFTER CLAMPING TIGHTEN LOCKING NUTS

INTERCHANGEABLE LIGHT ENGINE

SPECIFICATIONS

	GW IFM16	GW IFM20	GW IFM48CC
LUMENS	6600	13000	12000
WATTAGE (MAX)	90	122	155
No. OF LEDs	16	20	48
I @ 12V	7.5	N/A	N/A
I @ 24V	3.8	5.1	6.5
BEAM ANGLE	65 DEG FWHM	65 DEG FWHM	65 DEG FWHM
LIGHT DIA	140mm (5.5")	140mm (5.5")	140mm (5.5")
LIGHT LENGTH	164mm (6.46")	164mm (6.46")	164mm (6.46")
LIGHT HEAD HEIGHT	4mm (0.16")	4mm (0.16")	4mm (0.16")
MOUNTING HOLES PCD	N/A	N/A	N/A
HULL CUTOUT DIA	101mm (4.00")	101mm (4.00")	101mm (4.00")
LIGHT APERTURE	70mm (2.76")	70mm (2.76")	70mm (2.76")
WEIGHT	5.2kg	5.2kg	5.2kg
LENS	8mm BOROSILICATE WITH ANTI-STICK COATING	8mm BOROSILICATE WITH ANTI-STICK COATING	8mm BOROSILICATE WITH ANTI-STICK COATING

SHEET: 1 OF 5

SCALE: 1:1.5 @ A3



© 2014 Square Rig Ltd THIS DOCUMENT MUST NOT BE REPRODUCED IN WHOLE OR IN PART AND MUST NOT BE USED OR DISCLOSED WITHOUT THE WRITTEN AUTHORISATION OF COASTLINE LED. NO DEVIATION FROM THIS DRAWING IS PERMISSIBLE WITHOUT WRITTEN AUTHORISATION FROM COASTLINE LED.

DESCRIPTION: GREAT WHITE GW16 /20 /48CC THRU HULL

MATERIAL: MARINE AB2 BRONZE GLASS LENS & ALUMINIUM INSERT

FINISH: SEE PART DRAWINGS

DRAWING No: GAA-0105 Iss P00A

ISSUE: P00 REV: A STATUS: