

SINCE
1964

SADIRA

Engine & Boat
Care Products

AFTER 55 YEARS OF RESEARCH, WE HAVE IT:

FAST, SAFE & BIODEGRADABLE
DESCALER



MAXIMUM EFFICIENCY
MINIMUM DAMAGE



SADIRA
is present in 20 countries



 REMOVES SCALE DEPOSITS IN LESS THAN 5 MINUTES

 USE IN COOLING SYSTEMS, MECHANISMS AND PROPELLERS



BIODEGRADABLE



Ref 3043....5 L



- ✓ Suitable for aluminium, bronze and gelcoat
- ✓ Does not damage rubber, gaskets or seals.
- ✓ Neutral odor
- ✓ Contains corrosion inhibitors



✓ IMMERSION – DIRECT APPLICATION

1



- Soak the component directly in a container with DE-20 and fresh water (from 25% to 50%)
- Let it work for 5 minutes, do not exceed 45 minutes
- Brush the scale deposit
- Rinse with fresh water


2




3



4

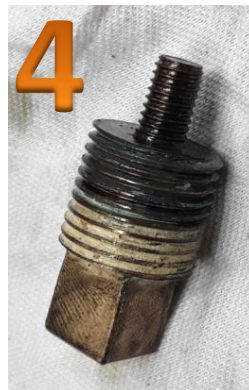


5

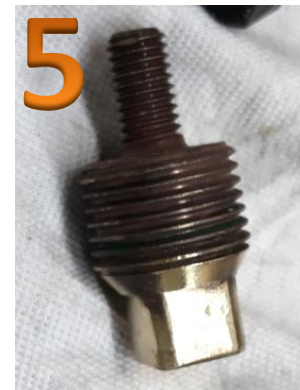

✓ DIRECT APPLICATION – COOLING SYSTEM




✓ DIRECT APPLICATION – COOLING SYSTEM

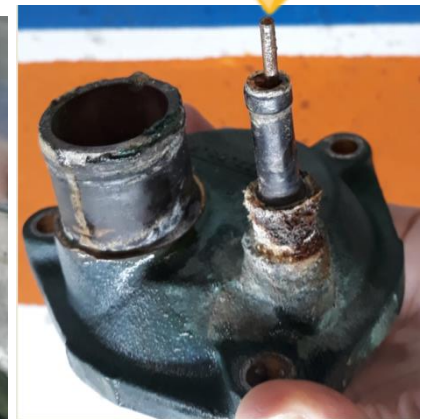

✓ RECIRCULATION: Outboard engine



- Horsepower (5 – 250):
 - Mix in a bucket, DE-20 with fresh water and place it under the propeller
 - Start the engine and let it absorb the mixture through the water inlet and circulate for about 15 minutes
- It can also be inserted from the top of the engine (removing the thermostat)

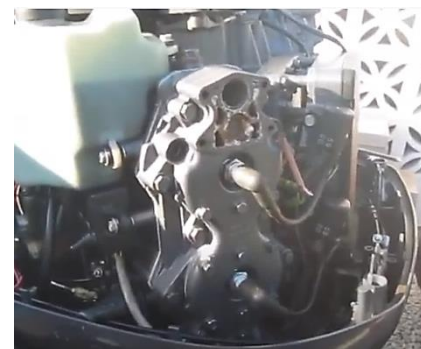

✓ RECIRCULATION: Inboard engine

- A flushing system is needed to inject DE-20 and recover it for recirculation
- Depending on the extent of scaling, use a solution of 25-50% with fresh water and do not exceed 45 minutes of application
- The solution has a red colour which disappear when it is neutralised

