



Fishing Boat Range



Complete Plumbing Systems from Whale



**Decades of experience in manual
and electric water systems**

**Long history of product quality
and customer service**

Innovative designs



Electric Pump Range

Freshwater Pumps



Product Code	UF0815	UF1215	UF1815	WD1815
Application	Freshwater	Freshwater	Freshwater	Washdown
Open Flow Rate	2.2 GPM	3.2 GPM	4.8 GPM	4.8 GPM
Voltage	12V d.c.	12V d.c.	12V d.c.	12V d.c.

- Universal mounting arrangement fits any existing installation
- Smooth constant flow and can run dry without damage
- Strainer and hose fittings included.

Washdown includes:

- Targeted high pressure flow
- Trigger handset with adjustable jet and lockable lever.
- IP65 rated pump



Fishbox Pumps

Gulper® Grouper

- Diaphragm pump - No impeller to clog or burn
- Non-choke valves
- Can run dry without damage
- Up to 6.75 US gals per minute at open flow
- Multi-directional head position
- Low amp draw

Product Code	BP4572	BP4574
Open Flow Rate	6.75 GPM	6.75 GPM
Voltage	12V d.c.	24V d.c.
Dry Running Current	5 Amps	2.5 Amps





Electric Bilge Pump Range

Orca Range

- Compact and powerful pump range
- Simple installation and maintenance
- Large filter base ensures maximum surface area exposure
- Low amp draw ensures longer life





NEW

Orca Auto 1300 -
high capacity automatic
submersible bilge pump

Product Code	BE0500	BE0950	BE1450	BE1454	BE1482	BE1484
Model	Orca 500	Orca 950	Orca 1300	Orca 1300	Orca Auto 1300	Orca Auto 1300
Open Flow Rate at 13.6V d.c.	500 GPH	950 GPH	1300 GPH	1300 GPH	1300 GPH	1300 GPH
Flow Rate at 1m (3ft) head	450 GPH	850 GPH	1100 GPH	1100 GPH	1100 GPH	1100 GPH
Voltage	12 V d.c.	12 V d.c.	12 V d.c.	24 V d.c.	12 V d.c.	24 V d.c.

Supersub Smart Range

- Low profile automatic bilge pump designed for narrow bilge spaces
- No separate bilge switch required
- Low, narrow design for confined spaces
- Quick and easy to install
- Unaffected by wave motion

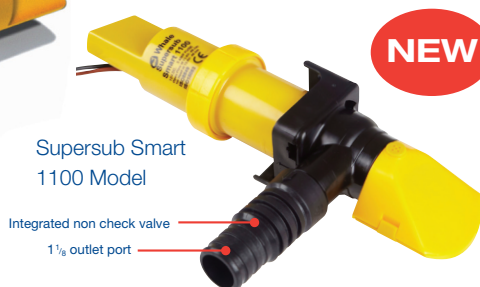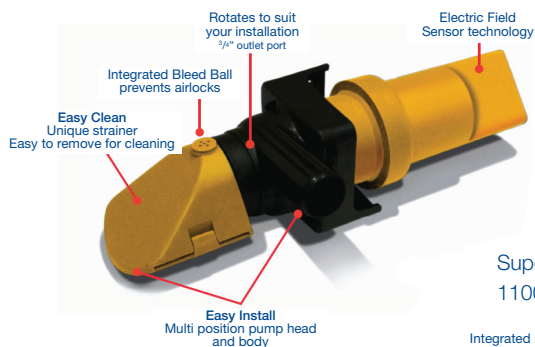

NEW

Supersub Smart
1100 Model

Product Code	SS5212	SS1212	SS1224
Open Flow Rate at 13.6V. d.c	650 GPH	1050 GPH	1050 GPH
Flow Rate at 1m (3ft) head	550 GPH	750 GPH	750 GPH
Voltage	12V d.c.	12V d.c.	24V d.c.





Faucet Range

Compact Faucet Range

Faucet Range ideal for Installation where space is limited



Product Code	TB4110	TB4112	TB4170	TB4180	TB4172
Model	Single Faucet Cold only with Valve	Mixer Faucet	Washdown Spigot	Pull Out Galley Mixer	Trigger Handset with Elbow
Finish	Chrome				Chrome and White

Compact Shower Range

- Modern, compact design
- Simple to install
- 2.1 m (7ft) hose length
- Stainless Steel cover

Product Code	RT2968	RT2978	RT2988
Model	Shower Handset	Shower Handset (Vertical)	Shower Mixer



Swim N Rinse Compact Shower

- Easy to use one hand trigger handset
- High performance - Great flow and pressure
- Ease of Installation - Straight or angled holder
- Cold only compact shower

Product Code	RT3000
Model	Chromed and plastic trigger handset with angled and straight holder.



sr_ps_sportfishing_v1_0911



Whale Support

tel: +1 802 367 1091
fax: +1 802 367 1095
usasales@whalepumps.com
whalepumps.com

Call us directly for product and installation advice

See Whale's full marine range at
www.whalepumps.com

Disclaimer

Whale's policy is one of continuous improvement and we reserve the right to change specifications without prior notice.
Illustrations are for guidance purposes only.